

Tubing

Aluminum Tubing (Pilot Tubing)



Sold By The Coil

- For HVAC, industrial machinery and equipment, appliances, instruments, pilot lights, plumbing & refrigeration
- Lightweight and corrosion resistant
- Can be fastened with rivets, bolts or welding
- Not recommended for fuel exhaust

Outside Diameter	Wall Thickness	Max Working Pressure	Coil Length	Part Number
3/16"	.028"	953 psi	50'	ALT3-50
1/4"	.035"	90 psi	5'	*11-293
1/4"	.035"	90 psi	50'	11-193
3/8"	.035"	565 psi	50'	ALT6-50

ALT Series is heat treated (annealed) to improve strength properties

* Comes with compression nut (#61-4), ball sleeve (#60-4) & breakaway ferrule (#81-4N)



For Pilot Nut, Ferrules & Sleeves See Fittings Section

Copper Tubing



Sold By The Coil

- For general use, refrigeration, gas and underground applications
- Soft, seamless and annealed for flexibility
- Durable

Outside Diameter	Wall Thickness	Max Working Pressure	Coil Length	Part Number
Gas Approved Type "G" (ASTM B88 / B837)				
Approved for underground and above ground use in Natural Gas & Propane Applications				
3/8"	.030"	912 psi	50'	CTGB6X50
1/2"	.035"	779 psi	50'	CTGB8X50
5/8"	.040"	722 psi	50'	CTGB10X50
Refrigeration Type "R" or "ACR" (ASTM B280)				
1/8"	.030"	3074 psi	50'	CTR2X50
3/16"	.030"	1935 psi	50'	CTR3X50
1/4"	.030"	1406 psi	50'	CTR4X50
5/16"	.032"	1197 psi	50'	CTR5X50
3/8"	.032"	984 psi	50'	CTR6X50
1/2"	.032"	727 psi	50'	CTR8X50
5/8"	.035"	618 psi	50'	CTR10X50
3/4"	.035"	511 psi	50'	CTR12X50
7/8"	.045"	582 psi	50'	CTR14X50
1 1/8"	.045"	582 psi	50'	CTR118X50

Tubing

Dishwasher Tubing - Rubber (EPDM)



Sold By The Carton or Reel

- Designed for the discharge of water from automatic dishwashers and other similar applications
- Flexible non-corrosive core, yarn reinforced black hose
- Temperature Range: -40C to 88C (-40F to 190F)
- Clamps: HC5, HC6

Actual I.D.	Hose O.D.	Working Pressure	Length	Part Number
5/8"	.910"	100 psi	50' Carton	DWH-10-50
			500' Reel	DWH-10-REEL

Note: Working pressure rated at 21C. Any ambient or internal increase in temperature will lower the working pressure

Vinyl Tubing



Sold By The Roll

- For air conditioning and refrigeration drains, condensate pump discharge lines, humidifier overflows and general purpose use
- Non-toxic
- General chemical resistance
- **7-xx Series resists crimping and kinking**

Inside Diameter	Outside Diameter	Maximum Working Pressure @ 70°F	Roll Length	Part Number
Sold By the Roll Only				
1/4"	3/8"	32 psi	100'	7-14P
3/8"	1/2"	27 psi	100'	7-38P
1/2"	5/8"	24 psi	100'	7-12P
5/8"	3/4"	21 psi	100'	7-58P
3/4"	15/16"	19 psi	100'	7-34P
1"	1 3/16"	15 psi	50'	7-10P

***Humidifier Tubing Available
For Most Makes And Models***

Water & Air Tubing - Polyethylene



Sold By The Roll

- For air and water applications, also used for beverage and soda transfer
- Non-toxic
- Low density
- Frost White color
- Temperature Range -60C to 65C (-76F to 150F), Fairview: -40C to +71C (-40F to +160F)
- FDA approved

Inside Diameter	Outside Diameter	Wall Thickness	Max Working Pressure	Roll Length	Brand	Part Number
.170"	1/4"	.040"	200 psi	100'	Diversitech	PE104
1/8"	1/4"	.062"	170 psi	100'	Fairview	360-4H-100
1/4"	3/8"	.062"	100 psi	100'	Fairview	360-6-100

Tubing

Water Supply (Potable) Tubing - PVC - Reinforced



Sold By The Foot

- Clear, non-toxic tube for potable water supply, marine drinking water lines, juice and beverage dispensing or in food processing applications. It can also be used for industrial applications such as light-duty air and wash-down hose, feed lines on carpet cleaning equipment, vacuum lines on packaging machinery and pneumatic lines on air operated equipment.
- Resistant to mild acid and alkali solutions
- Slightly blue tinted PVC in compliance with FDA, USDA, 3A, NSF & California Proposition 65 requirements
- Temperature range -5C to 65C (23F to 149F)

Inside Diameter	Outside Diameter	Working Pressure		Roll Length	Part Number
		@ 20C	@ 50C		
3/4"	1.03"	150	85	200'	G911-075
1"	1.30"	125	75	200'	G911-100
1 1/4"	1.62"	100	55	100'	G911-125
1 1/2"	1.94"	100	50	100'	G911-150
2"	2.49"	75	35	100'	G911-200

Water Suction Tubing - PVC - Reinforced



Sold By The Foot

- Use year-round for water suction lines in construction, rental, mining and agricultural applications
- Clear, flexible, high molecular weight PVC supported by a rigid blue PVC helix
- Stays flexible at sub-zero temperatures
- Mild chemical resistance
- Temperature range -40C to 65C (-40F to 150F)
- Vacuum Rating @ 20C: Full
- Bend Radius: 3"

Inside Diameter	Outside Diameter	Working Pressure		Roll Length	Part Number
		@ 20C	@ 40C		
1"	1.26"	90	65	100'	G941BW-100
1 1/4"	1.51"	90	65	100'	G941BW-125
1 1/2"	1.79"	90	65	100'	G941BW-150
2"	2.38"	90	65	100'	G941BW-200

Water Suction Hose (Effluent & Sewage) - EPDM Rubber & Plastic




Sold By The Foot

- Durable green hose for septic tank cleaning. Also used in farming, mining and construction.
- EPDM suction hose combines the best qualities of rubber and plastic, it's lightweight, flexible, with a hard, non-marking cover
- Weather and mild chemical resistant
- Will stay flexible at very low temperatures
- Temperature range -35C to 60C (-31F to 140F)

Inside Diameter	Outside Diameter	Working Pressure	Vacuum Rating	Bend Radius	Roll Length	Part Number
1 1/4"	1.61"	70 psi	Full	5"	100'	G1341-125
1 1/2"	1.96"	60 psi	Full	6"	100'	G1341-150
2"	2.49"	60 psi	Full	9"	100'	G1341-200

Tubing

Tubing Insulation

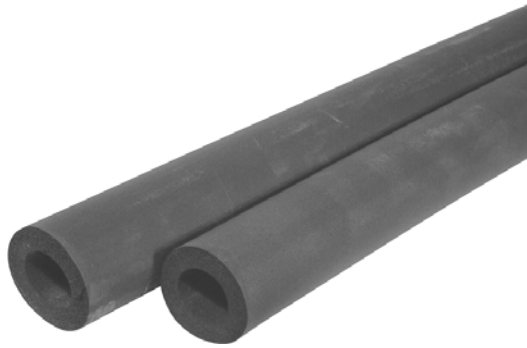

- Flexible thermal insulation
- Will not absorb moisture over long periods of use
- Weather resistant
- High resistance to common corrosive chemicals
- Black, marked in blue ink

Inside Diameter	Wall Thickness	Length	Part Number
5/8"	3/8"	6'	7-3858
3/4"	3/8"	6'	7-3834
7/8"	3/8"	6'	7-3878