


Chemicals

Cement (For PVC, ABS & CPVC)

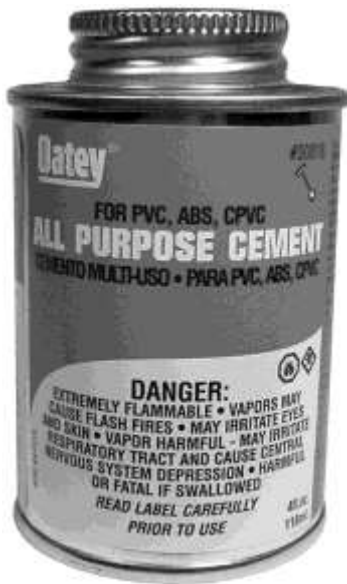

- All purpose cement for PVC, ABS, CPVC pipe and fittings up to 6" in diameter
- 2 hour cure time at 16C (60F) before pressure testing (up to 180 psi). Longer cure times may be required at temperatures below 16C or with pipe diameters above 3"

Size	Brand	Part Number
118ml	Oatey	530-30818

Oatey



For Water Treatment Chemicals See Water Treatment And Purification Chemicals Section

Chemicals

Coil Cleaners



PRO-GREEN



358-20

- Professional strength formula cleans, brightens, deodorizes and degreases air cooled condensers, evaporators, electronic filters, fan blades, etc.

Triple-D™ Coil Cleaners:

- Universal degreaser, detergent & deodorizer
- Ideal for indoor and outdoor condenser and evaporator coils, will not damage aluminum or copper, spray on-rinse off
- Metal & rubber roof safe, non-foaming, economical
- NSF registered and is safe for use in food processing facilities

Size	Brand	Part Number
PRO-GREEN™ Liquid, 1 Gallon Self rinsing, non-toxic	Diversitech	PRO-GREEN
SAF-N-KLEEN™ Foam, Aerosol, 19 oz Self rinsing, no harsh fumes, non-acid	Diversitech	358-20
Triple-D™ Concentrate, 1 Gallon Makes 75% more mixed coil cleaner than conventional concentrations	Diversitech	TRIPLE-D
Triple-D™ Aerosol, 19 oz Spray-on can	Diversitech	TRIPLE-D-AER
Triple-D™ Pre-Diluted Trigger Sprayer, 1 Quart Ready to use, no mixing, spray-on bottle	Diversitech	TRIPLE-D-RTU



TRIPLE-D



TRIPLE-D-AER

Hand Cleaner




- Heavy duty hand cleaner
- Industrial strength, lanolin-enriched pumice emulsion
- Fast and efficient with no acids or other caustic chemicals
- Removes grease, grime, paint, soot, carbon, ink, cement and more
- Biodegradable

Size	Brand	Part Number
Pumice Lotion, 455 ml squeeze bottle	Masters	HC455



Hydronic Heating System Cleaning & Treatment Chemicals

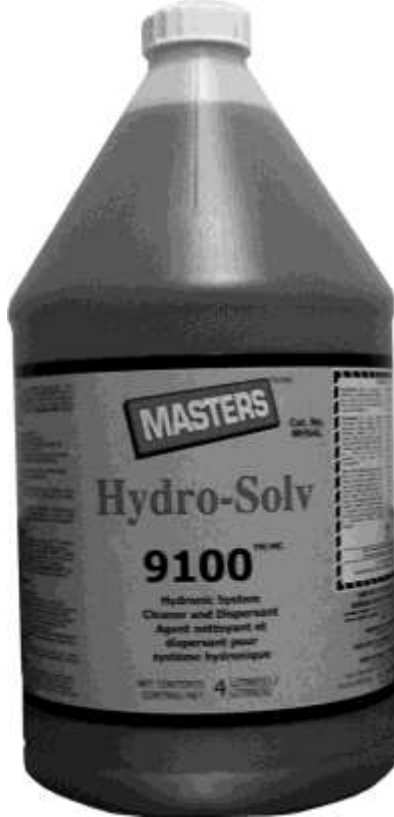

Hydro-Solv 9100 System Cleaner

- Help recover lost efficiency and lower your heating bill while also removing scale, corrosion, bacteria, solder-flux, cutting oil, dirt & rust
- Safely and effectively cleans aluminum, brass, copper, iron and steel components of new and used systems
- Environmentally friendly, non-hazardous and contains no acid or TSP
- Recommended use per jug: 2000 sq ft mixed at a ratio of 50:1 (water:chemical)

PRO-TEK 922 Inhibitor Treatment

- Oxygen inhibiting boiler treatment approved by major boiler manufactures to protect aluminum, brass, copper, iron and steel equipment during warranty from corrosion and scale build up
- Environmentally friendly and non-hazardous
- Contains glycol which will keep equipment's efficiency high even in colder temperatures
- Recommended use per jug: 2000 sq ft mixed at a ratio of 50:1 (water:chemical)

Description	Brand	Part Number
Hydro-Solv 9100 System Cleaner Concentrate, 4L Jug	Masters	MHS4L
PRO-TEK 922 Inhibitor Treatment Concentrate, 4L Jug	Masters	MPT4L



Chemicals

HVAC Cleaner / Degreaser



- For use on electronic air cleaner collector cells, condenser coils, evaporator coils, cabinets and other non-electrical components
- Spray on, rinse off smoke deposits, grease and inorganic soils
- Biodegradable

Size	Brand	Part Number
Spray, 946ml	Masters	HVLC946
Refill, 4L	Masters	HVLC4L



Ice Machine Cleaner (Concentrate) - SUPER-KOOL™



- Nickel and metal safe for all types of ice machines
- Fast, non foaming unique acid sequestrant formula quickly removes soil and mineral buildup
- Highly concentrated formula insures low use cost
- USDA authorized

Size	Brand	Part Number
1 gallon	Diversitech	SCM-705-01



Cutting Oil



- For hand tool and machine applications
- Specially blended for threading pipe

Size	Brand	Part Number
1L	Masters	CO1L
4L	Masters	CO4L



For Water Treatment Chemicals See Water Treatment And Purification Chemicals Section

Chemicals

Heat Conductive Compound



- Used to enhance contact and heat transfer in temperature sensor applications
- Not for use above 149C (300F)
- Pleasant odor

Size	Brand	Part Number
4oz	Honeywell	107408

Honeywell

Leak Detectors



LD227



LD500

Masters Gas Leak Detector

- Liquid bubble type
- Use on air and gas lines, tanks, cylinders, valves, fittings, tubing, piping, pressure vessels appliances, etc.
- Use on hot or cold piping
- Non-freezing to -35F

BIB BUBBLE Gas Leak Detector

- Liquid bubble type
- For natural gas, refrigeration, nitrogen, air, carbon dioxide, and other pressurized gas
- Non-corrosive, non-freezing, non-toxic
- Will not cause corrosion or deterioration of metal, copper, brass or plastic
- Water soluble polymer detects large and small leaks
- Bubbles remain up to 10 minutes
- Not recommended for oxygen systems



LD8



LDS

Size	Brand	Part Number
Applicator Bottle 8oz	Masters	LD227
Spray Bottle 500 ml	Masters	LD500
Bottle 4L	Masters	LD4L
BIG BUBBLE Fluorescent Yellow: Non-staining dauber formula Iridescent Blue: Special Spray formula usable from -23° to 100° C		
Big Bubble Dauber Top Container 237 ml Fluorescent Yellow	Whitlam Plum-Pro	LD8
Big Bubble Jug with Spout 1 Gallon Fluorescent Yellow	Whitlam Plum-Pro	LD1
Big Bubble Spray Bottle 473 ml Iridescent Blue	Whitlam Plum-Pro	LDS



Chemicals

Lubricants



ZS75



Y70AA-1C



PLUBE

- **All purpose oil (ZS75):**
Telescoping spout reaches everywhere
- **Gas Valve Thread Grease (Y70AA-1C):**
Will not run at high temperatures
Remains pliable at low temperatures
Lubricates from 0C to 79C (32F to 175F)
- **CSL 841 Silicone Compound (PLUB):**
Non-curing paste
Non-corrosive and non-toxic
Retains consistency from -50C to 200C (-58F to 392F)
Highly water repellent and resists oxidation

Size	Brand	Part Number
4 fl oz	Alltemp	ZS75
2.5oz	Baso	Y70AA-1C
80ml	CSL	PLUBE

Lubricant / Penetrant



- Quick acting super penetrating oil
- Cuts through and prevents rust
- Displaces moisture and inhibits corrosion

Size	Brand	Part Number
4 fl oz	Alltemp	RB75

Chemicals

Sealants



6-202-1



01714

- **Sealing Compound (6-202-1):**
For plugging openings through foundations or around refrigeration tube entry
Non-hardening
- **Foam Sealant (01714):**
For lineal caulking applications
Paint to protect from UV exposure
Contains fire retarding chemical
Fully cures in 12 hours

Size	Brand	Part Number
1lb (slug)	Diversitech	6-202-1
12oz (foam)	Diversitech	01714



Silicone Sealant



- Creates a water tight, mildew and crack resistant seal
- Rated for interior and exterior use from 50° to 450°F
- Ideal for tub/shower surrounds, kitchen and bathroom sinks, siding window frames, tiling, countertops
- Re-sealable cap
- High Heat Red is rated for -85° to 500°F consistent or 600°F intermittent and can be used for sealing around oven, flues on gas appliances, metal stack and ductwork

Size	Brand	Part Number
Aluminum 300 ml cartridge	Masters	SS300-AL
Clear 300 ml cartridge	Masters	SS300-C
Grey 300 ml cartridge	Masters	SS300-G
Translucent 300 ml cartridge	Masters	SS300-T
White 300 ml cartridge	Masters	SS300-W
High Heat Red 300ml cartridge	Masters	RED302



Chemicals

Super Seal FLEX INJECT™ Sealant



**QUICK & EASY INSTALLATION:
INSTALL INTO FULLY-CHARGED SYSTEM**

1. Ensure system is running.
2. Connect the red push button valve to the high side service port.*
3. Connect the blue low loss fitting to the low side service port.
4. Remove puck and press red button for 3 to 5 seconds to inject sealant.
5. Once sealant is dispensed, disconnect red push button valve from system.
6. Remove blue low loss fitting from system.

**NO SYSTEM RUN TIME REQUIRED
AFTER INJECTION**



*If no highside port is available - Attach red push button valve to a refrigerant cylinder & follow steps 3-6.

- Triple power sealant is the fastest, most effective proven way to permanently seal and prevent air conditioning and refrigeration leaks
- Installs in seconds - no tools or gauges required
- No recovery, no pump down and no run time required - just connect and go
- Simply connect the Flex Inject hose to the high and low side service ports. Remove the foam pre-release safety feature, press the push button and the misting orifice will release the sealant into the system without causing liquid slugging. The sealant goes to work immediately traveling through the system with both the oil and refrigerant stopping leaks.
- Three times more powerful than other tube injection systems
- Reacts with micro droplets of water at the exterior of the leak creating a protective barrier to keep refrigerant from escaping
- Unless the system is opened, the sealant continues to work preventing future leaks
- Polymer free and works with all compressors, heat pumps, condensers, recovery units and other system components
- Will not plug up manifold gauges, metering devices, thermostatic expansion valves, pistons or cause cap tube blockages
- Suitable for use in aluminum and copper coils and is microchannel friendly
- Uses organosilanes, a low viscosity particle free liquid that forms a low tensile crystalline structure and creates a permanent non-polymer based seal

Description	Brand	Part Number
Use in systems up to 6 tons (up to 20 KW) Fully compatible with all oils and refrigerants including R134A, R404A, R407C & R410A	Diversitech	985



Silicone Tooling Foam



- Designed to provide professional tooling results with no tools and less mess
- Once sprayed over freshly laid silicone, this tooling foam stops the silicone from spreading out over the surface. As you tool the silicone, the spray causes excess silicone to collect on your finger in a non-tacky ball that can easily be wiped off with a paper towel.

Size	Brand	Part Number
370g Spray Can	Masters	MSTF-370

Application

- Step 1:**
Lay new bead of silicone on surface
- Step 2:**
Spray tooling foam along freshly laid silicone bead
- Step 3:**
Tool the silicone into place with finger
- Step 4:**
Wipe access silicone away from finger; residual foam will evaporate

Thread Sealants



CP250BT



NL250BT



NM250BT



PD250BT



93803

- Metallic Compound Pipe Thread Sealant (CP250BT):**
 Heavy duty for both metal and plastic threaded connections
 Effectively seals most liquids and gases up to 6000psi & 550F
 Can be easily disassembled even after years of service
 Lubricates during assembly, won't set up hard, prevents galling and seizing of threaded connections, will not dry out in container
 Not for use with potable water systems
- No Leak Pipe Thread Sealant (NL250BT):**
 Specially formulated for water, air, steam and most oils & gases
 Paste will not drip, run, separate or dry out in the container
 Lubricates during assembly, won't set up hard, prevents galling and seizing of threaded connections
- Non-Metallic Compound Pipe Thread Sealant (NM250BT):**
 Effectively seals liquids and gases. Specially formulated for natural gas. Excellent for gas, oils, air, water, liquid foods and drugs
 Paste will not drip, run, harden or dry out in the container
 Lubricates during assembly, won't set up hard, prevents galling and seizing of threaded connections
- Pro-Dope Pipe Thread Sealant with Teflon (PD250BT):**
 Recommended for use on all metal, polypropylene, nylon & PVC, CPVC and ABS threaded connections
 Non-toxic, non-corrosive, non-hardening white paste
 Will not dry out, stain, harden or separate
 Seals against leakage from -129C to 204C (-200F to 400F)
- Leak Lock (93803):**
 Soft setting pipe joint compound for sealing threaded joints, flanged joint, gasket surfaces and mating surfaces Resin based paste which remains permanently flexible, adheres to internal surfaces, fills voids and is ideal with extreme vibration

Size	Brand	Part Number
250ml Brush Top	Masters	CP250BT
250ml Brush Top	Masters	NL250BT
250ml Brush Top	Masters	NM250BT
250ml Brush Top	Masters	PD250BT
1 1/3oz	Highside Chemicals	93803

This Page Left
Intentionally
Blank



This Page Left
Intentionally
Blank



This Page Left
Intentionally
Blank



This Page Left
Intentionally
Blank

