


# Gas Appliance Accessories - BBQ Outlets

## Gas Outlets - Natural & Propane Gas

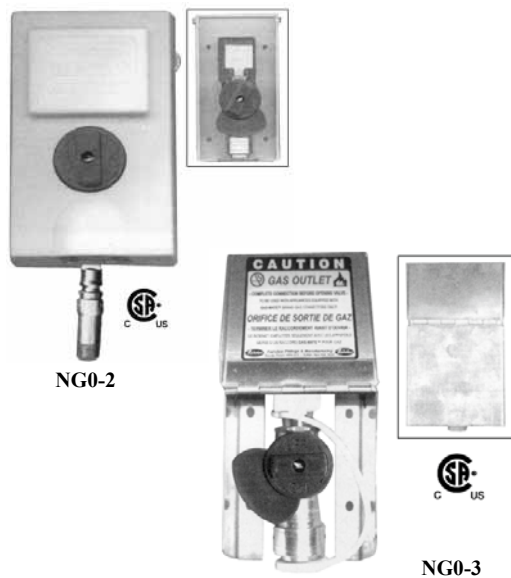

- Barbecue / Gas Appliance Outlets
- Thermal Protection Device shuts of flow of gas at 121C (250F)
- CSA Convenience Outlet (valve with coupler)
- Appliance attachment with nipple
- Outlet dust plug
- **White ABS Cover (#NG0-2)** is UV/shock resistant and includes standoff spacers, mounting bracket & installation instructions
- **Stainless Steel Cover (#NG0-3)** includes installation instructions

Description	Dimensions (HxWxD)	Brand	Part Number
Gas Outlet - White ABS Cover	5 3/4" x 3 1/2" x 2 1/2"	Fairview	NG0-2
Gas Outlet - Stainless Steel Cover	6 1/4" x 3 1/2" x 2 1/2"	Fairview	NG0-3

**Natural Gas CSA Rated 60,000 BTU/H @ .3" W.C. Pressure Drop (133,000 BTU/H Max Flow)**

**Propane Gas CSA Rated 90,000 BTU/H @ .3" W.C. Pressure Drop (202,000 BTU/H Max Flow)**


## Barbeque Hose Assemblies - Natural Gas - Rubber



- Type 1 Propane / Natural Gas Hose Assemblies
- CSA Approved to CGA Standard 8.1 (thermoplastic 8.3) used to conduct natural gas in a gaseous state and propane in either A liquid or gaseous state up to 350 psi

Ends		Hose ID	Length	Brand	Part Number
45° SAE Female Flare	MPT				
3/8"	3/8"	3/8"	10' (120")	Fairview	I6C120FS6MP6
3/8"	3/8"	3/8"	12' (144")	Fairview	I6C144FS6MP6
3/8"	3/8"	3/8"	15' (180")	Fairview	I6C180FS6MP6
3/8"	1/2"	1/2"	10' (120")	Fairview	I8C120FS8MP8

## Quick Disconnect Couplings - Natural Gas & Propane

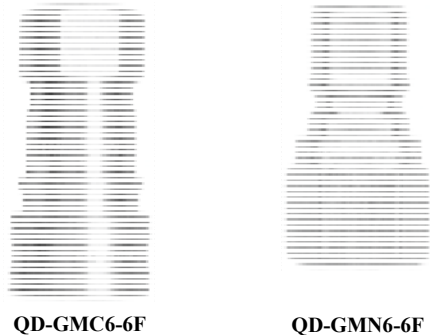

- CSA certified for natural gas & LP gas - air mixtures
- Interchanges with Hansen and Sturgis brands
- Quick disconnect rated to 1/2psi

Description	Body Size	Pipe	Brand	Part Number
Valved Coupler - Brass	3/8"	3/8" F	Fairview	QD-GMC6-6F
Nipple - Brass	3/8"	3/8" FPT	Fairview	QD-GMN6-6F
Coupler - Brass	1/2"	1/2" F	Fairview	QD-GMC8-8F
Nipple - Brass	1/2"	1/2" FPT	Fairview	QD-GMN8-8F



# Gas Appliance Accessories - Gas Connectors

## Appliance Gas Connectors

- Poly coated stainless steel gas connectors
- The yellow polymer coating is uniformly applied to cover the entire length of the connector to provide protection from ammonia, acids, chlorine, and other corrosive chemicals found in many home care products used to clean surfaces, bleach and laundry softeners etc, as well as harsh environmental influences such as UV rays and sea salt
- 100% tested and inspected for leaks and defects
- Manufactured from high tensile strength 304 SS without solders or brazed joints
- Deep corrugations enhance the flexibility making installation easier
- CGA tested and approved to comply with:

ANSI Z21.75 / CSA 6.27 Connectors for Outdoor Gas Appliances and Manufactured Homes

ANSI Z21.24 / CSA 6.10 Connectors for Gas Appliances

Length	Ends	BTU/Hour	Brand	Part Number
12"	1/2" FIP x 1/2" MIP	180,000	Boshart	<b>GAC-F8M8-12</b>
24"	1/2" FIP x 1/2" MIP	150,000	Boshart	<b>GAC-F8M8-24</b>
36"	1/2" FIP x 1/2" MIP	125,000	Boshart	<b>GAC-F8M8-36</b>
48"	1/2" FIP x 1/2" MIP	106,000	Boshart	<b>GAC-F8M8-48</b>
60"	1/2" FIP x 1/2" MIP	93,200	Boshart	<b>GAC-F8M8-60</b>
24"	3/4" FIP x 3/4" FIP	150,000	Boshart	<b>GAC-F12-24</b>
36"	3/4" FIP x 3/4" FIP	125,000	Boshart	<b>GAC-F12-36</b>
48"	3/4" FIP x 3/4" FIP	106,000	Boshart	<b>GAC-F12-48</b>
60"	3/4" FIP x 3/4" FIP	93,200	Boshart	<b>GAC-F12-60</b>
Zinc Plated Steel Gas Connector Fittings				
1/2" MPT x 15/16" - 16 Thread Flare Connection			Boshart	<b>GACF-M8</b>
1/2" MPT x 15/16" - 16 Thread Flare Connection			Boshart	<b>GACF-F8</b>
3/4" MPT x 15/16" - 16 Thread Flare Connection			Boshart	<b>GACF-F12</b>



**GAC-F8M8**



**GAC-F12**



**GACF-M8**



**GACF-F8**



# Gas Appliance Accessories - Gastite® Gas Piping System

## Gastite® Flexible Gas Piping System - Tubing



**Gastite®**  
The System is the Solution™

- CSST flexible gas piping supplies natural gas or liquefied petroleum (LP) gas to appliances in commercial and residential applications
- Made from corrugated stainless steel tubing, the Gastite® piping system bends, flexes & easily maneuvers its way through complex building structures and designs
- XR2 fittings require less torque and have no o-rings or gaskets
- Lightweight, annealed 304 stainless steel makes tubing more flexible
- Pre-marked by the foot and 100% factory pressure tested

Description	Part Number
<b>1/2" Corrugated Stainless Steel Tubing</b>	
Sold By The Foot	S93-8A4-1
125' Coil (sold by roll only)	S93-8A4-125
250' Coil (sold by roll only)	S93-8A4-250
<b>3/4" Corrugated Stainless Steel Tubing</b>	
Sold By The Foot	S93-11B4-1
125' Coil (sold by roll only)	S93-11B4-125
250' Coil (sold by roll only)	S93-11B4-250
<b>1" Corrugated Stainless Steel Tubing</b>	
Sold By The Foot	S93-16A4-1
75' Coil (sold by roll only)	S93-16A4-75
150' Coil (sold by roll only)	S93-16A4-150
<b>1 1/4" Corrugated Stainless Steel Tubing</b>	
Sold By The Foot	S93-20A4-1
75' Coil (sold by roll only)	S93-20A4-75
150' Coil (sold by roll only)	S93-20A4-150

APPROVALS	
Standards	
-ANSI LC1-2005 / CSA 6.26-2005	
-ISO 9001:2000	
Listings	
-CSA	
-ICC	
-IAPMO	
Codes	
-BOCA	-SBCCI
-CABO	-UMC
-NFPA	-UPC
-ICC	-CGA

**Gastite® installs 30-70% faster than traditional piping methods**  
75% fewer fittings in the average installation means a safer system,  
less leak potential and reduced callbacks



**See Page G35 For Commercial Quality IPEX Pipe Clamps**

- Multiple Mounting Options, Corrosion Resistant

**Note: Installation must be performed by an installer who has successfully completed a training program recognized by Titeflex® and has been issued a Gastite® Certification Card.**

# Gas Appliance Accessories - Gastite® Gas Piping System

## Gastite® Flexible Gas Piping System - XR3 Brass Fittings

- XR2 fittings patented Jacket-Lock® eliminates exposed stainless steel beyond the nut
- Cut tolerant and require less torque
- Self-guiding assembly to ensure a perfectly even flare
- Metal to metal seal, with no split rings, O-rings or gaskets
- All components are fully reusable



Description	Part Number			
	1/2"	3/4"	1"	1 1/4"
Straight Fitting-Adapter/Nut/Bushing (NPT)	XR3FTG-8-24	XR3FTG-11-24	XR3FTG-16-12	XR3FTG-20-6
Tee Fitting	XR2T-8-12	XR2T-11-12	XR2T-16-6	-
Coupling	XR3CPL-8-12	XR2CPL-11-12	XR2CPL-16-6	XR3CPL-20-6
Termination Fitting With Flange-Adapter/Nut/Bushing (NPT)	XR3TRM-8-12	XR3TRM-11-12	XR3TRM-16-6	XR3TRM-20-6
Termination Fitting Without Flange-Adapter/Nut/Bushing (NPT)	XR3TRM-8-NF-12	XR3TRM-11-NF-12	XR3TRM-16-NF-6	FSTRM-20-NF-6



XR3FTG



XR2T



XR2CPL



XR3TRM



XR3TRM-NF

## Gastite® Flexible Gas Piping System - Accessories

- **Striker Plates:** Used for protection against puncture threats
- **Steel Conduit:** Provides additional protection where striker plates cannot be easily installed
- **Modular Stub System:** All stubs create a fixed point "stub-out" on a wall or floor surface for meter and appliance attachment. This reduces the number of joints in the system.
- **Manifold:** Provides central distribution point for individual runs to each appliance

Description	Part Number
Half Striker Plate - 3" x 7"	TFM201-50
Full (Drop-In) Striker Plate - 1/2" & 3/4" CSST	TFM211-25
Steel Conduit - 1" x 1' fits 1/2" CSST	LFLOPPY-16-50
Steel Conduit - 1 1/4" x 1' fits 3/4" CSST	LFLOPPY-20-25
Steel Conduit - 1 1/2" x 1' fits 1" CSST	LFLOPPY-24-25
Modular Stub System - 1/2"M x 1/2"M x 1 1/2" Stub length with 1/2" female fitting	XR3-APSTUB-8-10
Modular Stub System - 1/2"M x 1/2"M x 1 1/2" Stub length with 3/4" female fitting	XR3-APSTUB-11-10
Manifold - Cast 4 Port - 3/4"F x 4 @ 1/2"F x 1/2"F, malleable iron	4-PORTMAN-10
Small Cutting Tool with Flat Rollers - 3/8" to 1"	GTCUTTER-SM
Large Cutting Tool with Flat Rollers - Up to 2"	GTCUTTER-LG
Replacement Blade - For GTCUTTER-SM	GTBLADE-SM-5
Replacement Blade - For GTCUTTER-LG	GTBLADE-LG-5



201

